

Technical Specifications



	SD01	RD01
Configuration	Channel Rail & Drive Unit	Sep Control Box And Drive Unit
Input Voltage	230VAC	230VAC
Motor Type	375w 0,5HP AC 6 Pole Induction	24V DC
Opening Lifting Force	1000N+	300N+
Opening/Closing Limit Travel	Up To 4.0 Mtrs	4,5 Turns of Door Drum Wheel
Safety Reversing System	Pot Adjustable Current Sensing	Pot Adjustable Current Sensing
Limit System	Screw Adjustable Micro Switch	Cam Adjustable Micro Switch
Receiver Type	UHF 433,92	UHF 433,92
Receiver Code Storage Capacity	6 X 4 Button Transmitter Codes	6 X 4 Button Transmitter Codes
Transmitter Frequency	433Mhz	433Mhz
Coding Type	Rolling Code	Rolling Code
No Of Code Combinations	Over 4.9 Million	Over 4.9 Million
Code Generation	Non- Linear Encryption Alg.	Non- Linear Encryption Alg.
Wallmounting For Remote	Included	N/A
Hand Held Transmitters	2 x 4 Button	2 x 4 Button
Transmitter Battery Voltage	12Volts	12Volts
Globe	60w 240V Edison Screw	15W 24V DC Edison Screw
Door Travel Speed	150mm/Sec	100-150mm/Sec
Auto Close	Dip Switch Selectable	Dip Switch Selectable
Photo Beams	Optional	Optional
Carton Dimensions	48cm X 33mm X 24cm	40cm X 31cm 34cm
Carton Dimension 3 Pce Rail	104 X 14,5mm X 12cm	N/A
Shipping Weight	Head 9kg Rail 8kg	6,9kg

Variation and upgrading of specification may occur without notice
WARRANTY – 2 years on the motor, 1 year on all other parts

Professionally installed by your Superlift installer



Superlift Garage Door Systems are available from, and should be installed by, an authorised Superlift installer. They are the complete garage door specialists who provide a friendly and professional measure, quote and installation service. They will be happy to advise you of the best product for your application and demonstrate the features of the Superlift range, instore.

They also provide a complete after sales service should you wish to upgrade your system with an opener, any of the accessory range or require repair or parts.

Your Superlift dealer



Key Pads




Safety Beams



Manual Release

Experience the difference
 Enjoy the pleasure

SUPERLIFT
 QUALITY AUTOMATIC GARAGE DOOR OPENERS

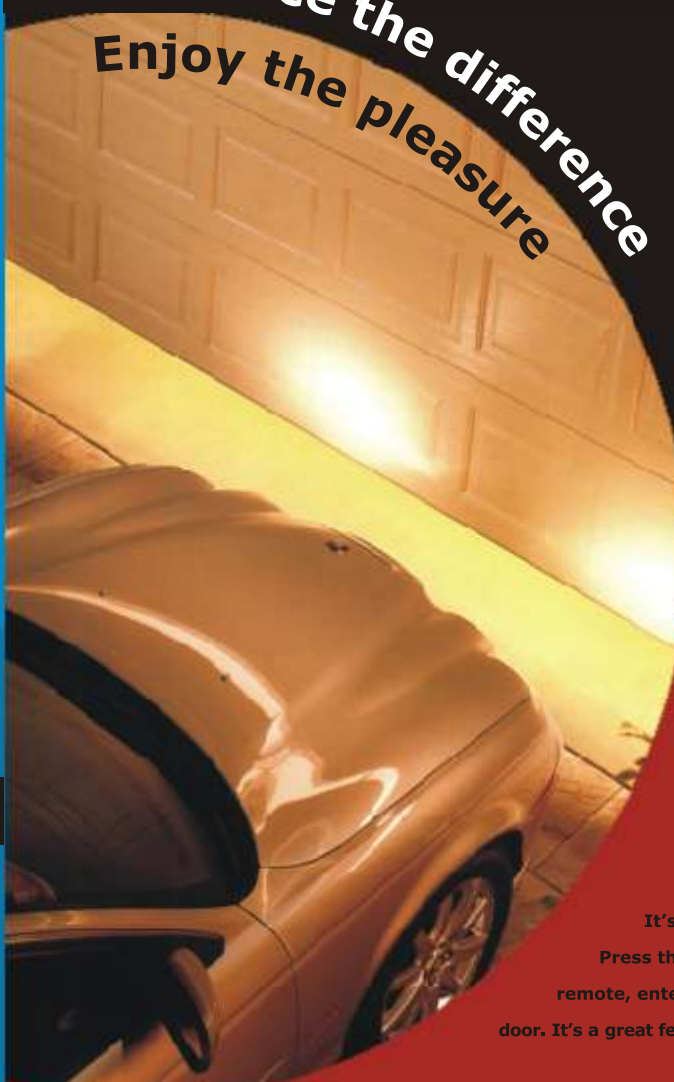

Push a button.
 Drive in.
 Safe at last.
 You are home.

It's dark, raining, windy and cold.
 Press the button on your 2 or 4 button remote, enter your lit garage and close the door. It's a great feeling to be dry, safe and secure.

Soon you will take this luxury for granted. But the need will always be there to improve your life, protect your family, year after year.

Importer: Securilift (Pty) Ltd T/A Superlift
 Email: info@securipower.co.za Tel: +27 21 447 1295

AT LAST HI-TECH AUTOMATION AT AN AFFORDABLE PRICE

RDO1 – ROLL UP DOORS

Powerful, Quiet DC Motor

Ultra silent DC motor and drive will lift your roll up door both quietly and with ease. The motor is guaranteed for 24 months from installation.



Fitted for Safety

The motor is fitted onto the drive rail and has no visual moving parts. Many motors have dangerous drive down mechanics on the sides of the door.



Minimum Side Room

The motor can be fitted in extremely narrow openings due to compact design of the unit.



Limits and Safety Force

The limits and safety force are easy to adjust with an Allan key. This ensures correct opening and closing travel.



Light Your Way

The light comes on as soon as the door is activated and stays on for two minutes permitting you to enter your property safely.



SDO1 – SECTIONAL AND TIP UP DOORS


Powerful, Quiet AC Motor

The competition beating ½ HP motor and gear mechanism will lift your door both quietly and with ease. The motor is guaranteed for 24 months from installation.



Safe and Silent Drive

The inverted rail design offers enhanced safety and appearance. The self-tensioning chain is maintenance free for life.

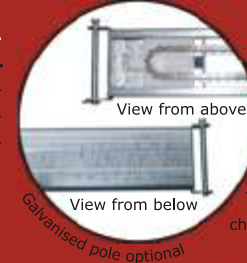

View from above
View from below
Galvanised pole optional

SUPER LIFT
your automatic choice
SDO-1

Automatic Safety Stop and Reverse

Your child and pets are safe. Correctly set, your door reverses if obstructed going down and stops if obstructed going up.



Secure Remote Controls

Two x4 button standard 433Mhz code are included. These extra secure code-hopping remotes are difficult to copy. Extra units are available.



Simple Controls

The panel offers easy start/run, code setting for extra remotes, up and down sensitivity and connections and setting for beams, wall buttons etc.



Easy Mounting

Versatile mounting system offers fixing in two different planes into a minuscule 45mm of headroom.



Light Your Way

The automatic light stays on for 2 minutes when activated, permitting you to enter your property safely.

